



US



EU



Product description

The Universal DVLED Frame is part of the BalanceBox DVLED solutions. With the interface brackets (481A13) it can be mounted to the BalanceBox 650 Height adjustable mount, it can be mounted on the wall or on the Mobile Stand (481A50). The mounting system can adjust to most All-in-One or cabinet based DVLED 5x5 panel arrays from 130" to appr. 136" depending on the brand.

It is also compatible with selected Motorized Mobile height adjustable mounts from BalanceBox.

Article number	Product description	Load capacity	
481B12	136" Universal DVLED Frame	180 kg	396 lb

Specifications

Materials and finish

- Frames: Aluminum black anodized
- Brackets: Steel powder coated black RAL9005 textured
- Handle-bars: Aluminum powder coated black RAL9005 textured

Technical Specifications

- Load capacity: 180 kg / 396 lb
- Panel size: DVLED Panel width between 2700 and 3300 mm / 106.3 and 129.9 in
- Vertical mounting point spacing: 800 to 1100 mm / 31.5 to 43.7 in
- Typical 5x5 array / All-in-One

Features

- Height and width adjustable frame for maximum compatibility
- Compatible with most brands 130 to 136 in indoor DVLED panels
- Step by step installation, quick, adaptable and easy
- Large handle for safe and easy operation
- Compatible with selected height adjustable BalanceBox mounts

Certificates & Safety

- CE



Compatible with



Article number	Product description
	<u>Required for use on the BalanceBox 650</u>
481B13	Set of interface brackets for DVLED Frame on BalanceBox 650
484A18	BalanceBox® 650-II Medium (with 481B13)
484A19	BalanceBox® 650-II Heavy (with 481B13)
	<u>In combination with the BalanceBox 650 (above)</u>
481A50	Mobile Stand for BalanceBox 650



US



EU

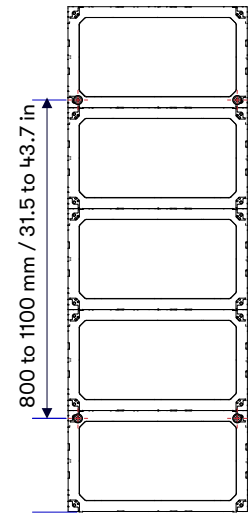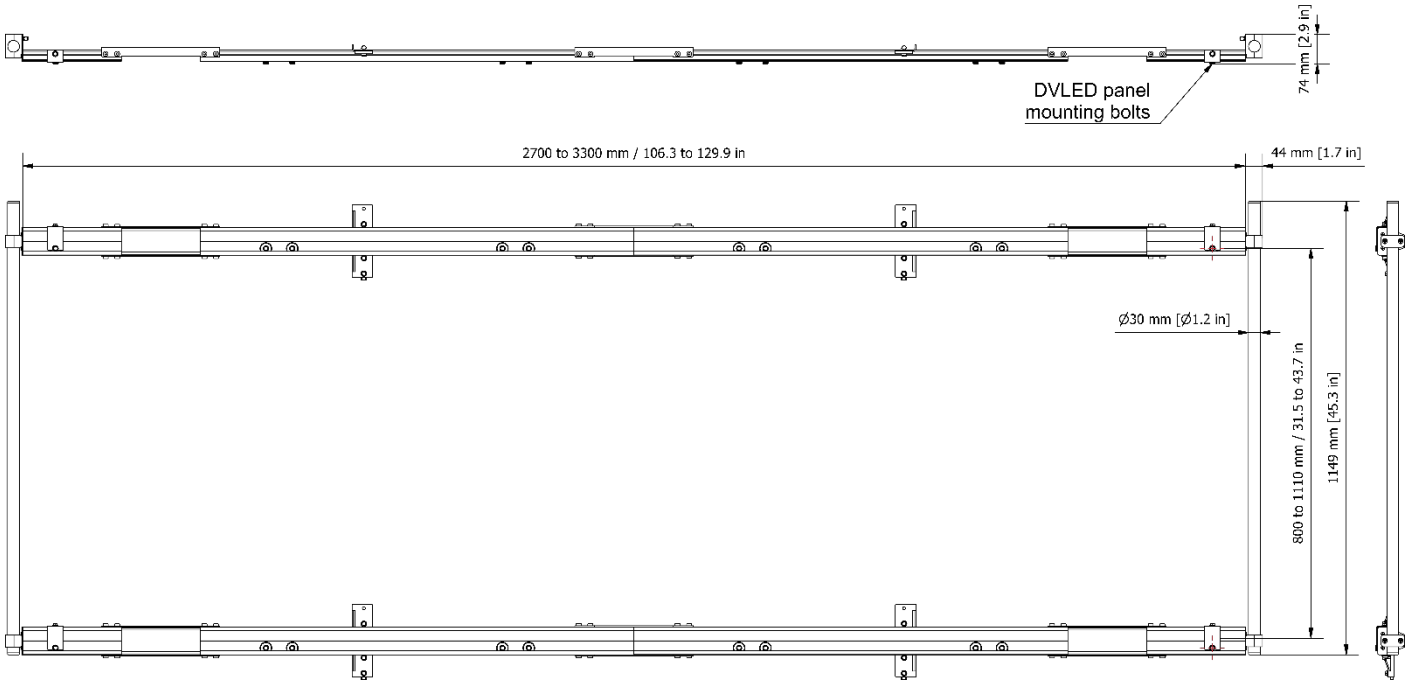

Download technical drawings here



EU



US

Weights & Dimensions

Shipping dimensions					Pallet		Qty: 15	
Height	210	mm	8.3	inch	1190	mm	46.8	inch
Width	325	mm	12.8	inch	800	mm	31.5	inch
Length	1200	mm	47.25	inch	1200	mm	47.25	inch
Shipping weight	±23	kg	±50.6	lb	369	Kg*	812	Lb*
Product weight	±21	kg	±46.2	lb				

*Full pallet shipping weight includes pallet